




# Touch Screen Assembly Instructions




## Items supplied in two separate boxes:

- 1.) Monitor with power supply cord and mounting screws (these are installed on back of monitor).
- 2.) Mounting brackets with support screws.  
\*Phillips head screwdriver required but not supplied).

- 1** Install the two supplied support/tensioner screws to the back of the mounting bracket until fully seated. (They are the longest screws supplied with the mounting bracket).

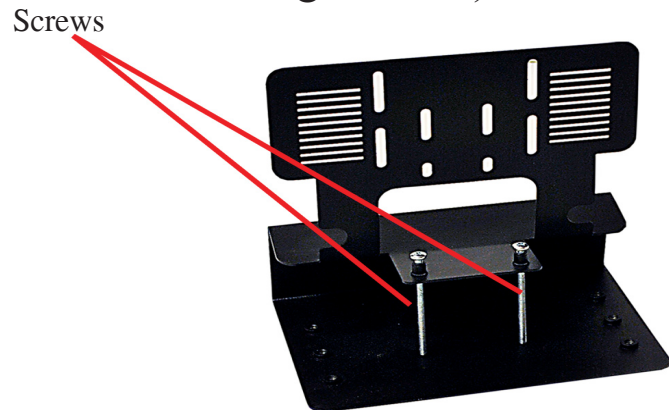


- 2** Remove the four lower screws (supplied with the monitor) from the back of monitor. [Keep these as they will be used to mount monitor to mounting bracket.]

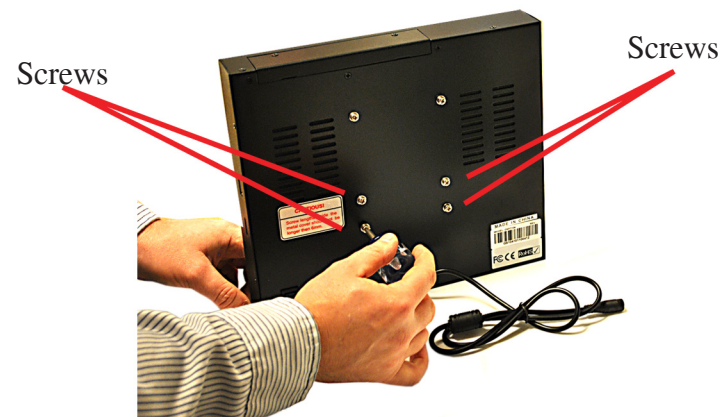

**3** Pull power supply cord through bracket opening while setting monitor onto mounting bracket. Install the four screws to back of monitor.



**4** Attach remaining power supply cord and you are ready to mount to shelving.

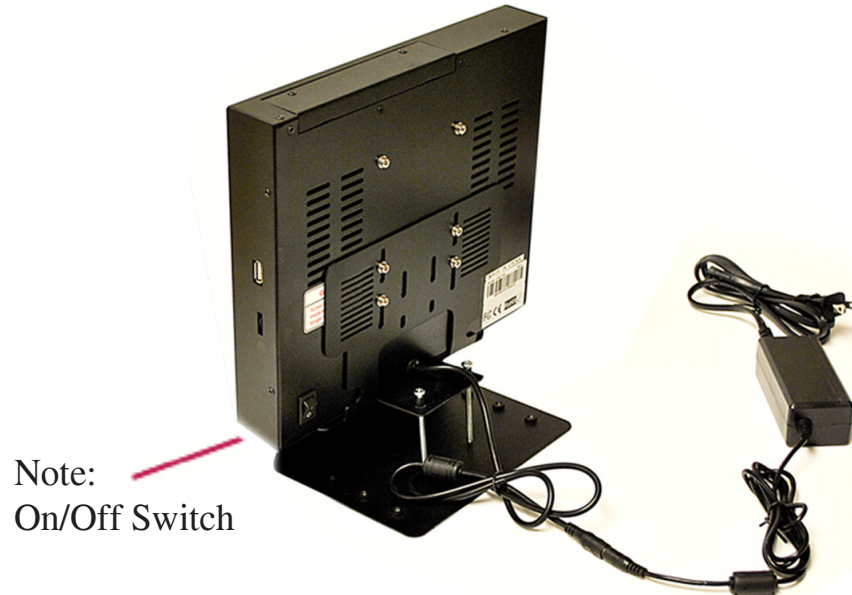

\*Suggested location shoulder to eye level.



Using supplied screws, mount from underside of shelving through holes. (Six screws-six screw holes) Not all are required to secure the monitor. Save extra screws for future use.

For wood or other solid shelving, use this alternate mounting option shown; Slide mounting bracket over shelving and tighten the support/tension screws until snug.

**DO NOT OVERTIGHTEN**  
(For wooden shelves we recommend a protective barrier between the screw & the shelf. i.e. shim)

